





DoorVaani.com GoAutoDial Configuration

Community Edition Version 3.3

1. Login into your GoAdmin
2. In the Admin Settings Menu (Left Side) please select "Carriers"

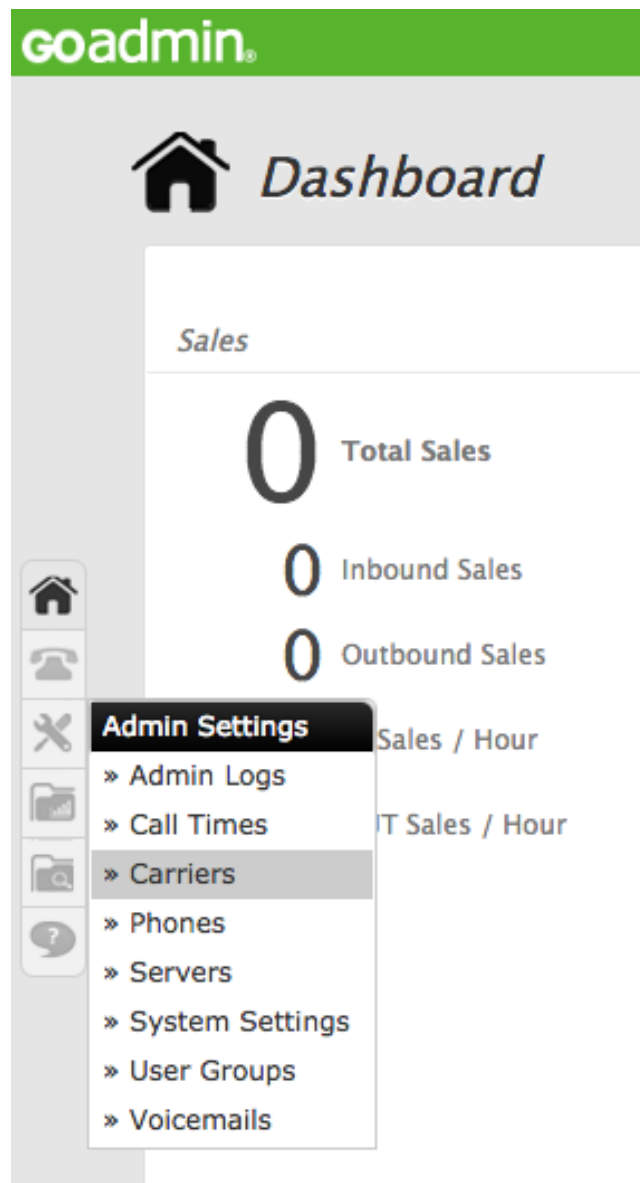

3. Add Carrier Wizard automatically opens if this is the first carrier you are adding. Else please click on the "Add New Carrier" link in the right top corner of carriers list to get to the Step 1. Please select "Carrier type" as "Manual" and click "Next".

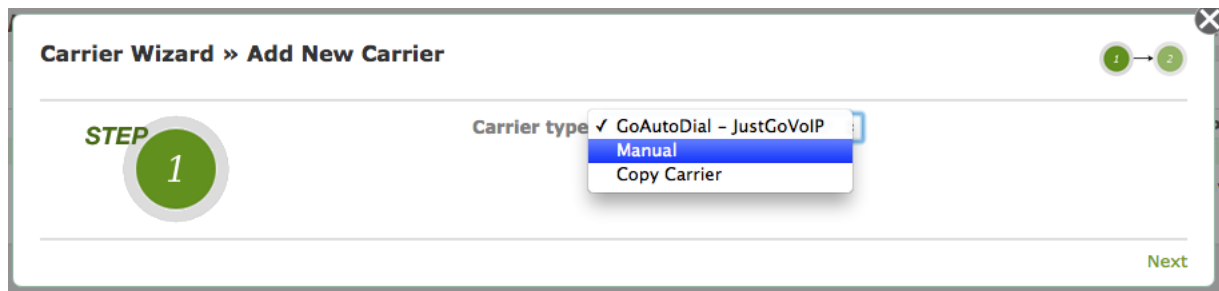

4. Please enter DoorVaani carrier details in the Step 2 of the wizard. Refer to the following screen shot on what values to enter:

Please select “Authentication” as “Registration”.

UserName: Your DoorVaani.com VOIP Line username

Password: Your DoorVaani.com VOIP Line Password here

Server IP/Host: as1.doorvaani.com

Port: 5060


Codecs: GSM, ULAW, ALAW and G729

DTMF Mode: RFC2833

Protocol: SIP

Click on “Submit” when done.

5. You will see “Add Carrier” success message and you can see the DoorVaani carrier in your carriers list after the page refreshes.

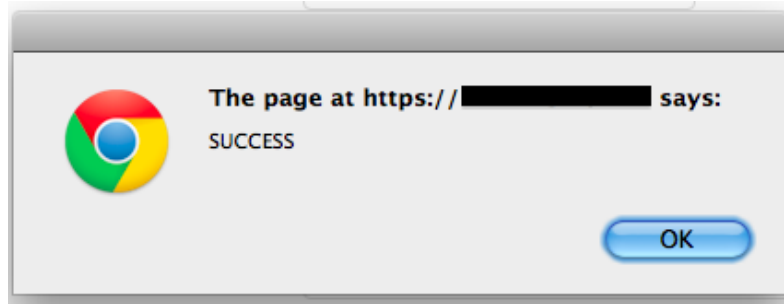

- Now you need to activate DoorVaani carrier to get this listed in the "Carrier to use" drop-downs when you create a campaign. Click on "Modiy Carrier" in the actions column (Small pencil icon). In the Modify Carrier pop-up, select "Y" in the "Active" drop-down.

MODIFY CARRIER: DV1

Carrier ID: DV1

Carrier Name: DoorVaani

Carrier Description: DoorVaani.com

Authentication: IP Based Registration

Username: YourVOIPLineUserName

Password: your_voip_line_password

Server IP/Host: as1.doorvaani.com

Port: 5060

Codecs: GSM ULAW ALAW G729

DTMF Mode: RFC2833 Inband Custom

Protocol: SIP

Server IP: [redacted] - GOautodial Ser

Active: Y N

Campaigns: [redacted] are no campaigns using this carrier.

[+] ADVANCE CONFIGURATION SAVE SETTINGS

- When you create or edit campaigns, please select DoorVaani as "The carrier to use for this campaign".

Campaign ID: TESTCAMP

Campaign Name: TEST CAMPAIGN

Campaign Description: test campaign for vicidial

Active: Y

Dial Method: AUTO DIAL

Auto Dial Level: SLOW

Carrier to use for this Campaign: CUSTOM DIAL PREFIX 9

Script: DV1 - 7231163896 - DoorVaani

Campaign CallerID: 0000000000

Campaign Recording: ON

Answering Machine Detection: OFF

Local Call Time: 24hours - default 24 hours calling